

Growatt TL-X model ShineLink Quick Installation Guide

1, Device list:

Item	Name	Quantity
A	ShineLanBox	1
B	ShineRFStick	1
C	Home router	1
D	Network	1



Figure1.Device picture

2, Connect:

A, Plug the ShineRFstick into the USB port.



Figure2.ShineRFstick install position

B, Connect the RJ45 interface of the ShineLanBox to the home router, then plug in the power adapter to power on the ShineLanBox. Note that the router should turn on DHCP enable mode.



Figure3.communication line interface location

3,Running operation:

Normally, this is automatic matching after power supply, matching in the factory, only when additional RF modules need to be re-matched, or if RF and Lanbox are not matched in the factory, they need to be matched as follow:

A, After plug the ShineRFstick into the USB port, and the power on .press the tail button.
Entering the configuration mode



Figure4.bottom button position

B, After power on the ShineLanBox. Use a tool to press the tail hole to enter the configuration mode

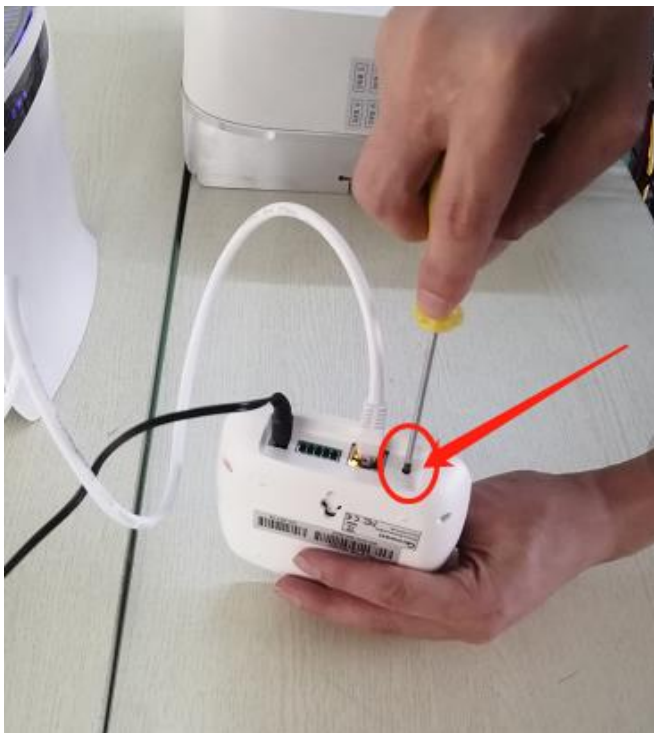


Figure5.bottom button position

Short press the button of the ShineRFStick and ShineLanBox , entering the configuration mode, if successful, the configuration LED of the ShineLanBox will be off ,and the blue LED of the ShineRFStick will flash slowly.

4,Install the ShinePhone APP:

A,Search“ShinePhone” in google play or app store, or scan the picture below, download and install the app.



NOTE: 1.Be sure to install the latest version of the software;
2.For more details, please refer to the conten on.
<http://server.growatt.com> .

【Android&iOS】

B,Run the ShiePhone APP and resister a new account.

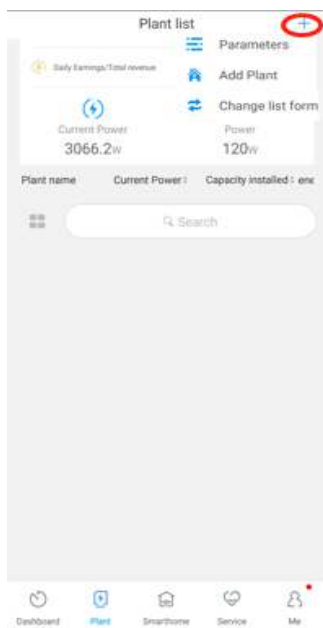


Figure6.Add plant though press the +

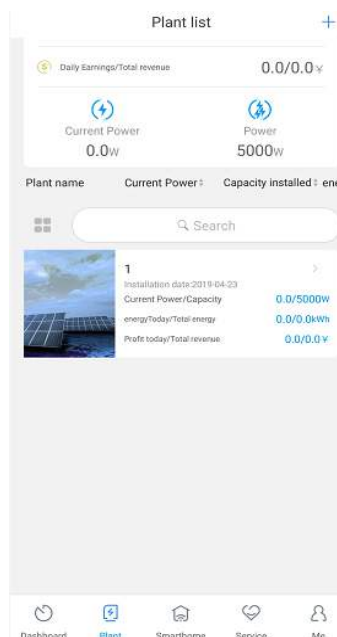


Figure7.Enter the plant

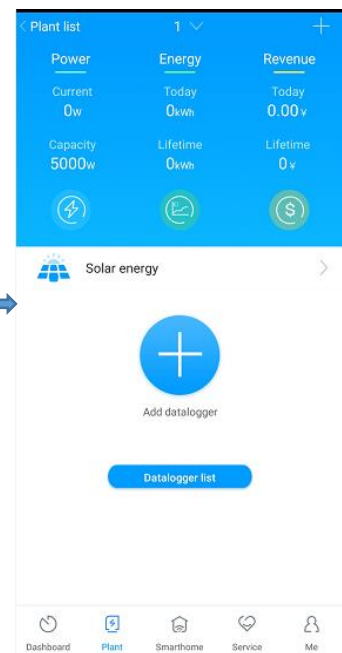


Figure8.Add the datalogger



Figure9.Scanning the barcode



Figure10.ShineLanBox bottom

C, When “my device list” appear ,means successfu.



Figure11.successful interface